


!aD“ p Ō g • #L†M J+

5JNJ0H TJMFOU DIBJOT GPS BVUPNPCJMF FOHJOF

·ϕ⌈ »úŌýĒ±¼²ŌδÁ´Ō÷ŌªŌÁŌÚÆŭ³μ·ϕ⌈ »úŌýĒ±¼μí²Ē-ĒĈ·ϕ⌈ »ú¹Ō¼¼ŭÁā²ĉ¼¼pĒ-¾¼BŌĐ½ĭ
 ,βμĀĈĉ⌈ĒĒĀĭ¾ĀĐŌŕí¾²ŌδĐŌμĒŌĀĀ¾ĐŌĀŪĭĒ

Silent chain for engine timing is mainly used for automobile engine timing system.
 The chain is the key engine component with excellent performances such as high strength, durability and silencing and so on.

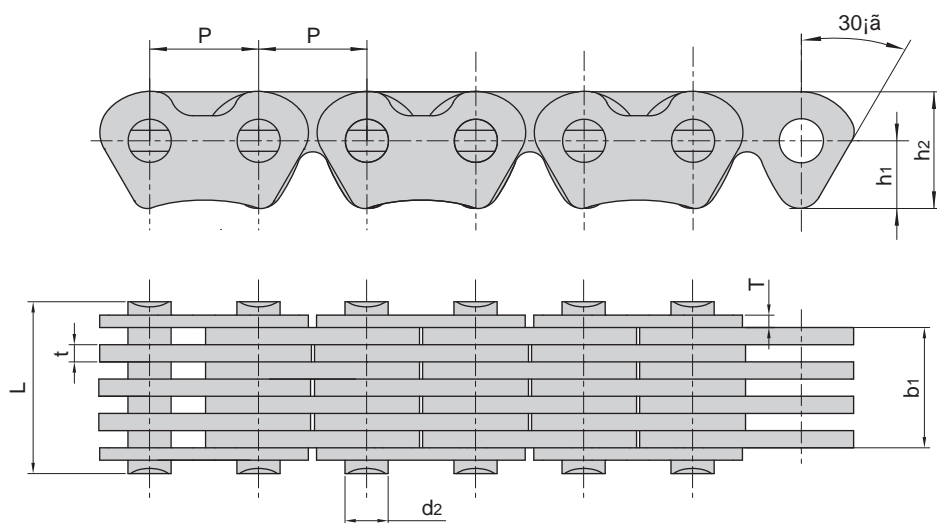

⌈«»ªĀŕĀ Donghua Chain No.	½Ū¾ā	Á´ĉĭ	ĭŭŌāŌ±¾¼⌈	ĭŭŌā³¼⌈Ē	Áªā,β⌈Ē	ÁªāŕĈĒ		μ¼ŭŌĐĭĒ½	Æ-Ēý Number of plate	ĉ¹Ā-ĈĉĒĒ	ĀĉĀx³¼ŌŌ		
	Pitch	Chain width	Pin diameter	Pin length	Plate depth	Plate thickness						Tensile strength	Weight per meter
	P	b ₁ min	d ₂ max	L max	h ₂ max	t max	T max						
mm	mm	mm	mm	mm	mm	mm		kN/lbf	kg/m				
CL04DF3	6.35	7.80	2.70	11.20	7.13	1.04/1.40	1.04	(ĭâ)Outside	8(4ĭĀ4)	10.0/2250	0.38		
	6.35	8.86	2.70	12.30	7.13	1.04/1.40	1.04	(ĭâ)Outside	9(4ĭĀ5)	12.5/2813	0.41		
CL04DF10	6.35	8.60	2.72	12.70	7.13	1.20	1.20	(ĭâ)Outside	9(5ĭĀ4)	12.0/2700	0.41		
CL05D	8.00	6.50	2.92	10.48	9.59	1.30	1.04	(ĭâ)Outside	7(3ĭĀ4)	12.0/2700	0.46		
	8.00	7.80	2.92	11.78	9.59	1.30	1.04	(ĭâ)Outside	8(4ĭĀ4)	16.0/3600	0.52		
CL05V	8.00	7.70	3.15	11.80	9.59	1.30	1.00	(ĭâ)Outside	8(4ĭĀ4)	12.0/2700	0.48		