


B a

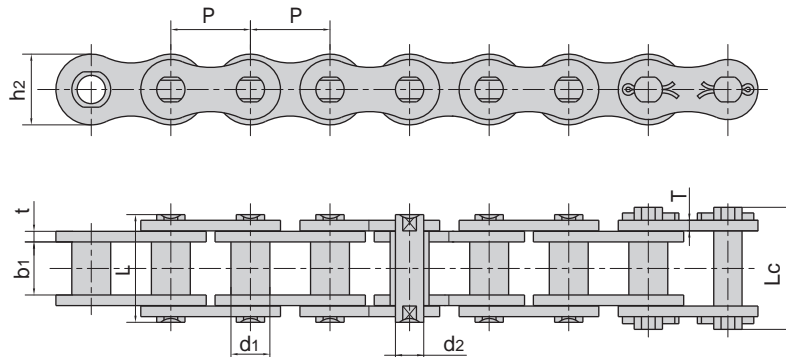

| 东华链号<br>Donghua<br>Chain No. | 节距<br>Pitch | 套筒直径<br>Bush<br>diameter | 内节内宽<br>Width<br>between<br>inner plates | 销轴直径<br>Pin<br>diameter | 销轴长度<br>Pin<br>length |           | 链板高度<br>Plate<br>depth | 链板厚度<br>Plate<br>thickness | 抗拉强度<br>Tensile<br>strength | 平均抗拉强度<br>Average<br>tensile<br>strength | 每米长重<br>Weight<br>per<br>meter |
|------------------------------|-------------|--------------------------|--|-------------------------|-----------------------|-----------|------------------------|----------------------------|-----------------------------|--|--------------------------------|
|                              | P           | d1<br>max                | b1<br>min                                | d2<br>max               | L<br>max              | Lc<br>max | h2<br>max              | T<br>max                   | Q<br>min                    | Q0                                       | q                              |
|                              | mm          | mm                       | mm                                       | mm                      | mm                    | mm        | mm                     | mm                         | kN/lbf                      | kN                                       | kg/m                           |
| P15F1-B                      | 15.000      | 9.00                     | 14.0                                     | 6.0                     | 25.3                  | 30.0      | 14.0                   | 2.03                       | 12.5/2852.5                 | 13.75                                    | 1.150                          |
| P20-B                        | 20.000      | 12.00                    | 16.0                                     | 8.0                     | 33.0                  | 36.0      | 18.0                   | 3.00                       | 25.0/5624                   | 27.50                                    | 2.140                          |
| P20F3-B                      | 20.000      | 12.00                    | 16.0                                     | 8.0                     | 33.0                  | 36.0      | 19.0                   | 3.00                       | 25.0/5624                   | 27.50                                    | 2.030                          |
| *PZ20-B                      | 20.000      | 12.00                    | 16.0                                     | 8.0                     | 33.0                  | 34.7      | 18.0                   | 3.00                       | 25.0/5624                   | 27.50                                    | 2.253                          |
| P25-B                        | 25.000      | 15.00                    | 18.0                                     | 10.0                    | 35.0                  | 39.0      | 24.0                   | 3.00                       | 31.5/7086                   | 34.70                                    | 3.170                          |
| P25F1-B                      | 25.000      | 15.00                    | 18.0                                     | 10.0                    | 35.0                  | 39.0      | 24.0                   | 3.00                       | 31.5/7086                   | 34.70                                    | 2.670                          |
| P30F2-B                      | 30.000      | 17.00                    | 20.0                                     | 11.0                    | 41.0                  | 45.4      | 28.0                   | 4.00                       | 40.0/8998                   | 44.00                                    | 4.250                          |
| P30F6-B                      | 30.000      | 17.00                    | 20.0                                     | 11.0                    | 42.4                  | 46.0      | 28.0                   | 4.00                       | 40.0/8998                   | 44.00                                    | 3.750                          |
| P35F2-B                      | 35.000      | 18.00                    | 22.0                                     | 12.0                    | 44.5                  | 48.0      | 30.0                   | 4.00                       | 50.0/11248                  | 55.00                                    | 4.330                          |
| P35F5-B                      | 35.000      | 18.00                    | 22.0                                     | 12.0                    | 44.5                  | 48.0      | 30.0                   | 4.00                       | 50.0/11248                  | 55.00                                    | 3.770                          |
| P36-B                        | 36.000      | 18.00                    | 22.0                                     | 12.5                    | 44.5                  | 49.0      | 30.0                   | 4.00                       | 60.0/13497                  | 66.00                                    | 4.200                          |
| P40-B                        | 40.000      | 20.00                    | 25.0                                     | 14.0                    | 52.4                  | 57.0      | 35.0                   | 5.00                       | 63.0/14172                  | 69.30                                    | 5.430                          |
| P45-B                        | 45.000      | 22.00                    | 30.0                                     | 16.0                    | 62.0                  | 66.5      | 40.0                   | 6.00                       | 80.0/17996                  | 88.00                                    | 7.540                          |
| P50-B                        | 50.000      | 26.00                    | 35.0                                     | 18.0                    | 68.0                  | 73.5      | 44.0                   | 6.00                       | 100.0/22495                 | 110.00                                   | 8.900                          |
| P55-B                        | 55.000      | 30.00                    | 45.0                                     | 20.0                    | 88.0                  | 93.5      | 49.0                   | 8.00                       | 125.0/28119                 | 137.50                                   | 13.920                         |
| P55F1-B                      | 55.000      | 30.00                    | 45.0                                     | 20.0                    | 88.0                  | 110.0     | 49.0                   | 8.00                       | 125.0/28119                 | 137.50                                   | 13.920                         |
| P55F4-B                      | 55.000      | 28.00                    | 45.0                                     | 20.0                    | 88.0                  | 93.5      | 43.0                   | 8.00                       | 125.0/28100                 | 137.50                                   | 12.400                         |
| P60-B                        | 60.000      | 32.00                    | 50.0                                     | 22.0                    | 94.1                  | 99.5      | 55.0                   | 8.00                       | 160.0/35993                 | 176.00                                   | 15.200                         |
| P65-B                        | 65.000      | 36.00                    | 56.0                                     | 26.0                    | 97.5                  | 113.0     | 61.0                   | 8.00                       | 200.0/44960                 | 220.00                                   | 18.900                         |
| P70-B                        | 70.000      | 30.00                    | 65.0                                     | 30.0                    | 117.0                 | 130.0     | 67.0                   | 10.00                      | 250.0/57050                 | 275.00                                   | 26.270                         |
| P80-B                        | 80.000      | 44.00                    | 70.0                                     | 32.0                    | 131.0                 | 150.0     | 75.0                   | 12.00                      | 315.0/71883                 | 346.00                                   | 31.800                         |
| P19.05                       | 19.050      | 12.70                    | 12.5                                     | 7.5                     | 31.6                  | 33.6      | 20.0                   | 4.15/3.25                  | 50.0/11248                  | 55.00                                    | 2.560                          |
| P19.05F50-B                  | 19.050      | 11.91                    | 12.9                                     | 7.5                     | 31.6                  | 34.8      | 20.0                   | 4.15/3.25                  | 40.0/8992                   | 44.00                                    | 2.530                          |
| P22.225F10-B                 | 22.225      | 14.30                    | 14.6                                     | 9.0                     | 36.3                  | 39.3      | 23.5                   | 4.80/4.00                  | 55.0/12364                  | 60.50                                    | 3.580                          |
| P22.225F3-B                  | 22.225      | 15.60                    | 14.6                                     | 9.0                     | 36.3                  | 38.0      | 23.5                   | 4.80/4.00                  | 75.0/16860                  | 82.50                                    | 3.750                          |
| P25.4F21-B                   | 25.400      | 15.88                    | 16.0                                     | 10.0                    | 42.5                  | -         | 26.8                   | 5.60/4.80                  | 80.0/17984                  | 88.00                                    | 4.700                          |
| P31.75F5-B                   | 31.750      | 19.05                    | 20.0                                     | 11.1                    | 46.0                  | 50.0      | 33.5                   | 5.60/4.80                  | 100.0/22480                 | 110.00                                   | 5.980                          |
| *P42.27F1-B                  | 42.270      | 13.00                    | 22.9                                     | 7.92                    | 41.0                  | 45.8      | 24.0                   | 3.20                       | 42.3/9509                   | 46.50                                    | 2.360                          |
| *P50.8F7                     | 50.800      | 18.50                    | 25.0                                     | 14.5                    | 53.5                  | 57.5      | 40.0                   | 5.00                       | 120.0/26994                 | 132.00                                   | 6.300                          |

\*直链板  
\*Straight side plates